

APPENDIX C

径向编带 Radial Taping

(mm)

VT					VT					VTE				
Radial Type Name	Radial Lead φd	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead φd	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead φd	AMMO (pcs)	Reel (pcs)	Weight g/AMMO
MFS1/2 □CVT	0.6	2000	2500	750	MFS1/4 □CVT	0.45	3000	3000	620	MFS1/2 □CVTE	0.6	2000	2500	750
MF1/4 □CVT	0.6	2000	2500	750	CFS1/4 CVT	0.45	3000	3000	720	MF1/4 □CVTE	0.6	2000	2500	750
RNS1/8 □CVT	0.6	2000	2500	750	SPR1/4 CVT	0.45	3000	3000	720	RNS1/8 □CVTE	0.6	2000	2500	750
J1/4Z CVT*	0.6	2000	2500	670						MOS1/2 CVTE	0.6	2500	2500	930
CF1/4 CVT	0.6	2000	2500	720						SPR1/2 CVTE	0.6	2500	2500	930
CFS1/2 CVT	0.6	2000	2500	800						CF1/4 CVTE	0.6	2500	2500	900
CFP1/4 CVT*	0.6	2000	2500	720						CFS1/2 CVTE	0.6	2500	2500	1000
CFPS1/2 CVT*	0.6	2000	2500	800						RF25 CVTE	0.6	2000	2500	750
RF25 CVT	0.6	2000	2500	750										
VTP					VTP									
Radial Type Name	Radial Lead φd	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead φd	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead φd	AMMO (pcs)	Reel (pcs)	Weight g/AMMO
MOS1/2 CVTP	0.6	2000	2500	740	MF1/4 □CVTP	0.6	2000	2500	750	CW1/2 CVTP	0.6	2000	—	750
MOS1 CVTP	0.6	1500	—	1110	RNS1/8 □CVTP	0.6	2000	2500	750	CW1 CVTP	0.8	1000	—	740
MOS2 CVTP	0.65	1000	—	1080	CF1/4 CVTP	0.6	2000	2500	740	CW2 CVTP	0.8	1000	—	1080
SPR1/2 CVTP	0.6	2000	2500	740	CFS1/2 CVTP	0.6	2000	2500	800	J1/4Z CVTP	0.6	2000	2500	670
SPR1 CVTP	0.6	1000	—	740	CFP1/4 CVTP	0.6	2000	2500	740					
SPR2 CVTP	0.65	1000	—	1080	CFPS1/2 CVTP	0.6	2000	2500	800					
MFS1/2 □CVTP	0.6	2000	2500	750	RF25 CVTP	0.6	2000	2500	750					
MT					MHT					FT				
Radial Type Name	Radial Lead φd	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead φd	AMMO (pcs)	Reel (pcs)	Weight g/AMMO	Radial Type Name	Radial Lead φd	AMMO (pcs)	Reel (pcs)	Weight g/AMMO
MFS1/4 CMHT	0.45	3000	—	620	CFS1/4 CMHT	0.45	3000	—	630	BPR26 CFT	0.6	500	—	790
CFS1/4 CMT	0.45	3000	3000	630	CFPS1/4 CMHT	0.6	3000	—	720	BPR58 CFT	0.8	500	—	1940
CFPS1/4 CMT	0.45	3000	3000	630	RF16 CMHT	0.45	3000	—	240					
J1/6Z CMT	0.5	2000	—	450										

□: T.C.R.

※ 导线上没有包裹绝缘体。 The insulated coating on the lead wire is not available.

关于MOSX·SPRX形状, 轴向编带MOS·SPR同一的形状适用。 Also for MOSX·SPRX types, radial taping in the same shape as MOS·SPR types is applicable.


本样本手册中记载的产品规格如有变更, 恕不一一奉告。订购及使用之前, 请仔细确认规格表的内容。
 用于车载设备、医疗设备、航空设备以及其他涉及人身安全、或可能引起重大损失的设备上时, 请务必事先与我司联系。这些产品在这类用途中出现故障或失灵可能导致人身事故或严重损坏。
 Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.
 Contact our sales representatives before you use our products for applications including automobiles, medical equipment and aerospace equipment.
 Malfunction or failure of the products in such applications may cause loss of human life or serious damage.

Mar. 2015


包装 Packaging

径向编带 Radial Taping


(mm)

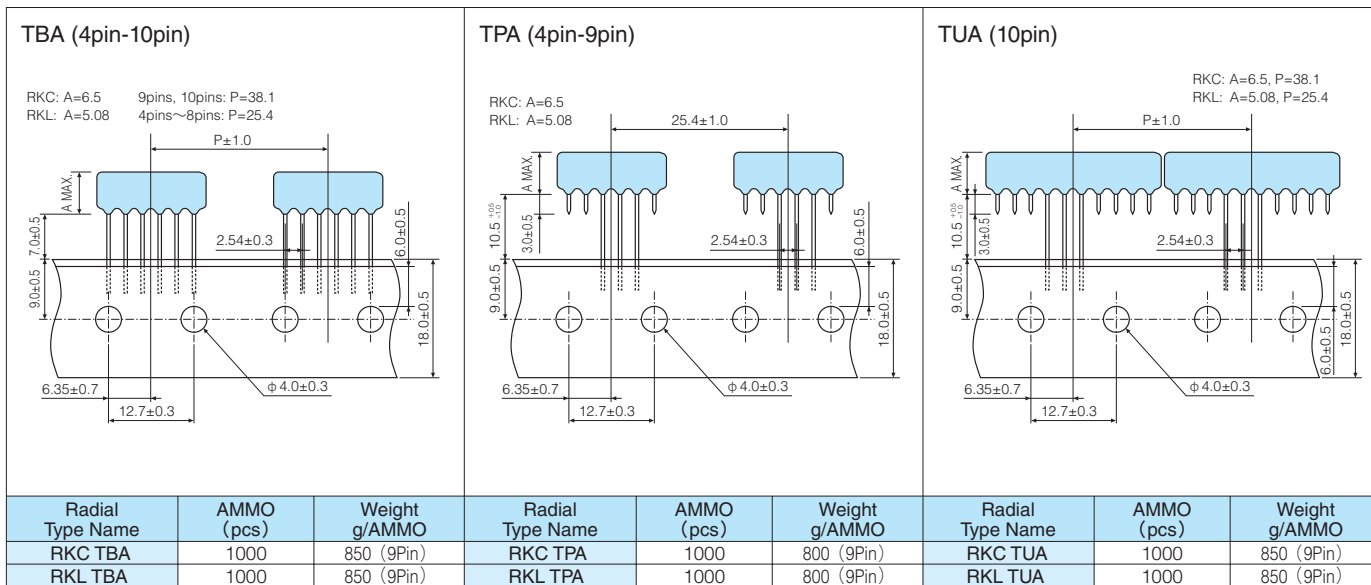

GT

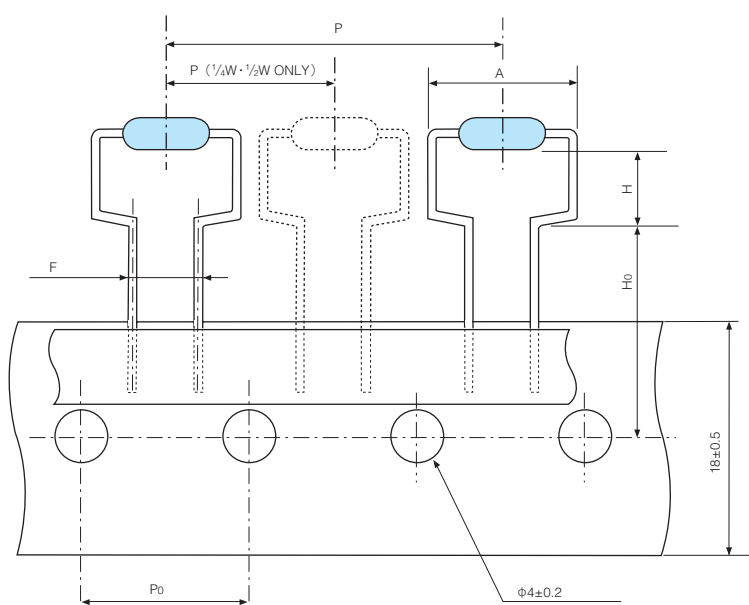

T

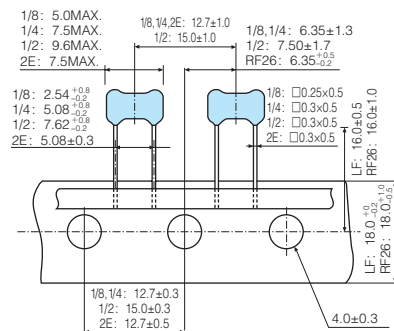

Radial Type Name	Radial Lead φ d	AMMO (pcs)	Reel (pcs)	Weight g/AMMO
LF1/8 □TT	—	2000	—	550
LF1/4 □TT	—	2000	—	580
LF1/2 □TT	—	2000	—	650
RF26B 2ETT	—	2000	—	580

Radial Type Name	Radial Lead φ d	AMMO (pcs)	Weight g/AMMO	F	P	P ₀	H	H ₀	A _{Max.}
MOS1/2CGT	0.6	2000	740	5±0.5	12.7±1.0	12.7±0.3	6.5 ^{+0.6} ₋₀	16±0.5	12
MOS1CGT	0.8	1000	730	7.5 ^{+0.8} _{-0.2}	30±1.0	15±0.3	6.5 ^{+1.0} ₋₀	19±0.7	14.5
MOS1CGT4	0.8	1000	700				4.0 ^{+1.0} ₋₀		
MOS2CGT	0.8	500	580				7.5 ^{+1.0} ₋₀		
MOS2CGT4	0.8	500	560				4.0 ^{+1.0} ₋₀		
MOS3CGT	0.8	500	910	5±0.5	12.7±1.0	12.7±0.3	8.5 ^{+1.0} ₋₀	16±0.5	21
SPR1/2CGT	0.6	2000	740				6.5 ^{+0.6} ₋₀		
SPR1CGT	0.8	1000	770				6.5 ^{+1.0} ₋₀		
SPR2CGT	0.8	500	540				7.5 ^{+1.0} ₋₀		
SPR3CGT	0.8	500	910	5±0.5	12.7±1.0	12.7±0.3	8.5 ^{+1.0} ₋₀	16±0.5	12
CFP1/4CGT	0.65	2000	720				6.5 ^{+0.6} ₋₀		
CFPS1/2CGT	0.8	1500	600				6.5 ^{+1.0} ₋₀		
CW1HCGT	0.8	1000	920				7.5 ^{+1.0} ₋₀		
RF50CGT	0.8	1000	730	7.5 ^{+0.8} _{-0.2}	30±1.0	15±0.3	6.5 ^{+1.0} ₋₀	19±0.7	14.5
RF1CGT	0.8	1000	770				8.5 ^{+1.0} ₋₀		
RF2CGT	0.8	500	1820				7.5 ^{+1.0} ₋₀		
CW2CGT	0.8	500	1080				7.5 ^{+1.0} ₋₀		
CW3CGT	0.8	500	1820	5±0.5	12.7±1.0	12.7±0.3	8.5 ^{+1.0} ₋₀	16±0.5	12
							8.5 ^{+1.0} ₋₀		

□: T.C.R

关于MOSX • SPRX形状，轴向编带MOS • SPR同一的形状适用。 Also for MOSX • SPRX types, radial taping in the same shape as MOS • SPR types is applicable.

本样本册中记载的产品规格如有变更，恕不一一奉告。订购以及使用之前，请仔细确认规格表的内容。

用于车载设备、医疗设备、航空设备以及其它涉及人身安全、或可能引起重大损失的设备上时，请务必先与我公司联系。这些产品在这类用途中出现故障或失灵可能导致人身事故或严重损坏。

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

Contact our sales representatives before you use our products for applications including automobiles, medical equipment and aerospace equipment.

Malfunction or failure of the products in such applications may cause loss of human life or serious damage.