

Crystal Oscillator NEW

NT1612AB


Temperature Compensated Crystal Oscillator(TCXO)
with E/D function for high-precision GPS

■ Main Application

Smartphone / Mobile phone, Wireless module, and GPS / GNSS module, etc.

■ Features

- A crystal oscillator with highly stable frequency / temperature characteristics best suited for GPS.
- Supports low power supply voltage. (Supports DC +1.7 V to +3.3 V.)
- Ultra-compact and light with a height, cubic volume, and weight of Max. 0.55 mm, 0.0011 cm³, and 0.004 g, respectively.
- With Enable / Disable(Stand-by) function.
- A surface-mount crystal oscillator. (Reflow soldering is possible.)
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.

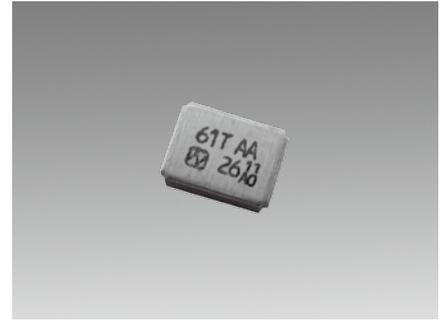

Pb
Free

RoHS Compliant
Directive 2011/65/EU


■ Specifications

Item	Model	NT1612AB	
Nominal frequency Range (MHz)		26 to 52	
Standard Frequency (MHz)		26	52
Supply Voltage [V _{CC}] (V)		+1.8	
Load Impedance		10 kΩ//10 pF	
Current Consumption	Enable (mA)	Max. 1.5	Max. 2.0
	Disable (μA)	Max. 2	
Output Voltage		Min. 0.8 V(p-p) (DC Coupling *1)	
Frequency/Temperature Characteristics		Max. ±0.5×10 ⁻⁶	
Operating Temperature Range (°C)		-30 to +85	
Storage Temperature Range (°C)		-40 to +85	
Frequency/Voltage Coefficient		Max. ±0.1×10 ⁻⁶ /+1.8 V±5 %	
Frequency/Load Coefficient		Max. ±0.1×10 ⁻⁶ /(10 kΩ//10 pF) ±10 %	
Long-term Frequency Stability		Max. ±1.0×10 ⁻⁶ /year	
Enable/Disable Function		Enable : 80%V _{CC} to V _{CC} ,	Disable : 0V to 20% V _{CC}
Specification Number		NSC5076A	NSC5076B

* Frequency setting conditions : Frequencies are set at normal temperatures (+25±2 °C).

*1. A DC-cut capacitor is not embedded in this crystal oscillator. Connect a DC-cut capacitor (1,000 pF) to the line-out terminal of the oscillator.

■ Dimensions

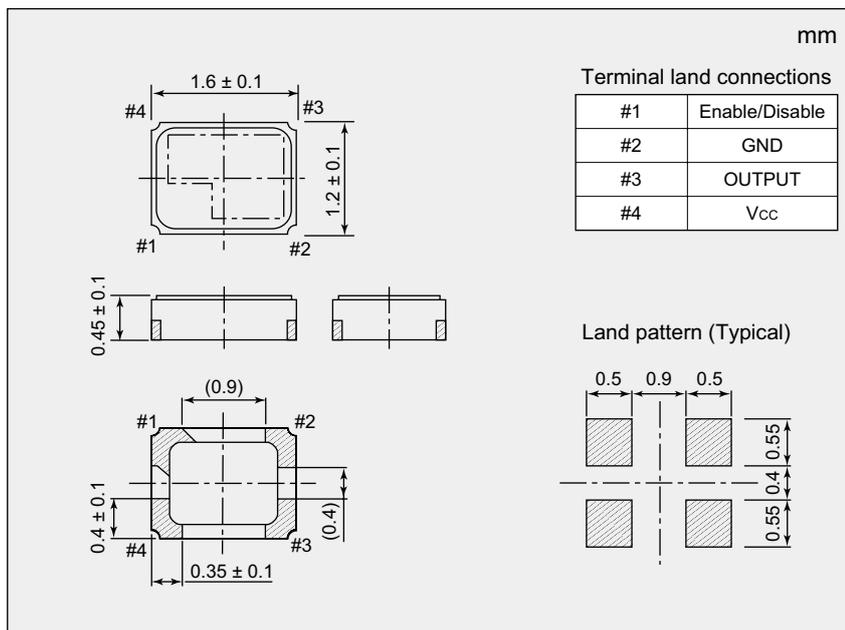

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.